




Performance Designs, Inc
 1300 E Int'l Speedway Blvd
 DeLand FL 32724
 Telephone: 386-738-2224
 Fax: 386-734-8297

**LINE TRIM CHART
 FOR
 PS LIGHTNING 160-176**

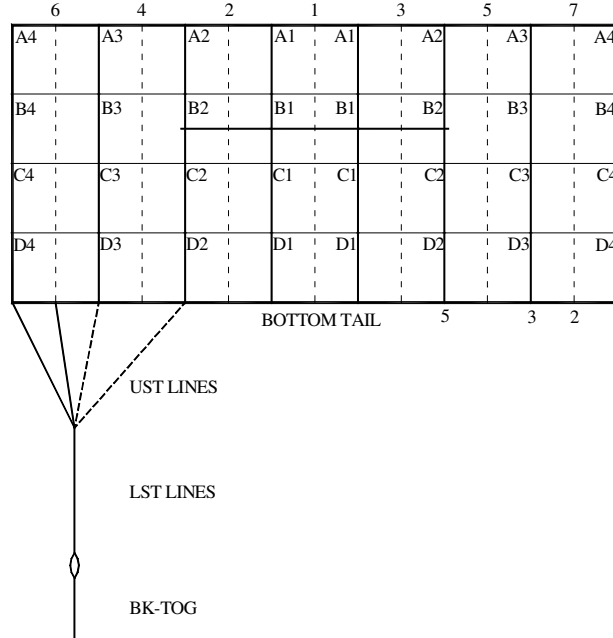

	160, 9'	160, 9.5'	160, 10'	176, 9'	176, 10'
CA1, CA4	106 3/8	112 1/8	118 1/8	106 3/8	118 1/8
CA-CB	1 1/2	1 5/8	1 7/8	1 1/2	1 3/4
CA-C	9 5/8	9 3/4	9 3/4	10	10 1/4
CA-D	17 1/8	17 1/4	17 3/8	18 1/4	18 1/2
A2, A3	107 3/8	113 1/4	119 1/4	107 1/2	119 3/8
A-B	1 3/4	1 3/4	1 5/8	1 5/8	1 5/8
A-C	8 5/8	8 5/8	8 5/8	9	9
A-D	16 1/4	16 1/4	16 1/8	17 1/4	17 1/4
CA4-UST	15 1/4	15 1/2	15 3/8	14 1/4	14 1/2
B STAB SLK	1/2	1/2	1/2	1/2	1/2
C STAB SLK	1	1	1	1	1
D STAB SLK	1 1/2	1 1/2	1 1/2	1 1/2	1 1/2
BRIDLE	79	79	79	79	79
BK-TOG*	16 1/4	16 1/4	16 1/4	17 1/4	17 1/4
Standard Slider	STD	17" Chord	17" Chord	17" Chord	17" Chord
	OPT	23" Chord	23" Chord	23" Chord	23" Chord
		31" Span	31" Span	31" Span	31" Span

*Due to development methodology, the finished BK-TOG dimensions may not scale
 Measurements in inches