




Performance Designs, Inc
 1300 E Int'l Speedway Blvd
 DeLand FL 32724
 Telephone: 386-738-2224
 Fax: 386-734-8297

**LINE TRIM CHART
 FOR
 PS LIGHTNING 113-143**

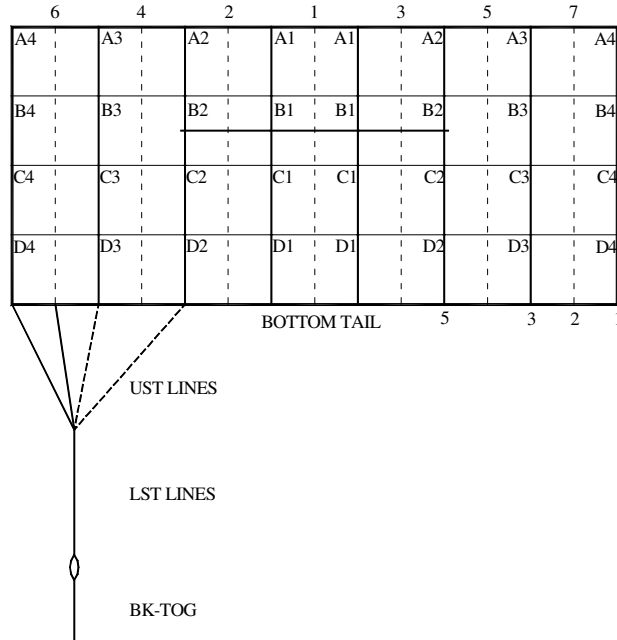

	113, 8'	126, 8'	126, 8.5'	126, 9'	143, 8'	143, 8.5'	143, 9'
CA1, CA4	94	93 3/8	99 1/8	105	94 7/8	100 3/4	106 5/8
CA-CB	1 3/8	1 1/4	1 3/8	1 5/8	1 1/4	1 3/8	1 5/8
CA-C	8 1/8	8 1/4	8 1/2	8 5/8	8 7/8	9	9 1/8
CA-D	14 1/8	14 7/8	15	15 1/4	15 7/8	16 1/8	16 1/4
A2, A3	94 3/4	94 1/8	100	106	95 5/8	101 1/2	107 1/2
A-B	1 1/2	1 1/2	1 1/2	1 1/2	1 5/8	1 7/8	1 7/8
A-C	7 1/4	7 1/2	7 5/8	7 1/2	8 1/8	8 1/8	8 1/4
A-D	13 3/8	14 1/8	14 1/8	14	15 1/8	15 1/4	15 3/8
CA4-UST	12 7/8	14 3/4	14 1/2	15	14 3/4	14 7/8	14 7/8
B STAB SLK	1/2	1/2	1/2	1/2	1/2	1/2	1/2
C STAB SLK	1	1	1	1	1	1	1
D STAB SLK	1 1/2	1 1/2	1 1/2	1 1/2	1 1/2	1 1/2	1 1/2
BRIDLE	79	79	79	79	79	79	79
BK-TOG*	12 3/4	13 3/4	13 3/4	13 3/4	15 1/4	15 1/4	15 1/4
Standard Slider	STD	17" Chord	17" Chord	17" Chord	17" Chord	17" Chord	17" Chord
	OPT	23" Chord	23" Chord	23" Chord	23" Chord	23" Chord	23" Chord
		31" Span	31" Span	31" Span	31" Span	31" Span	31" Span

*Due to development methodology, the finished BK-TOG dimensions may not scale
 Measurements in Inches